


FLEX Series next generation

10mm • 6mm

Remarkably bendy LED tiles

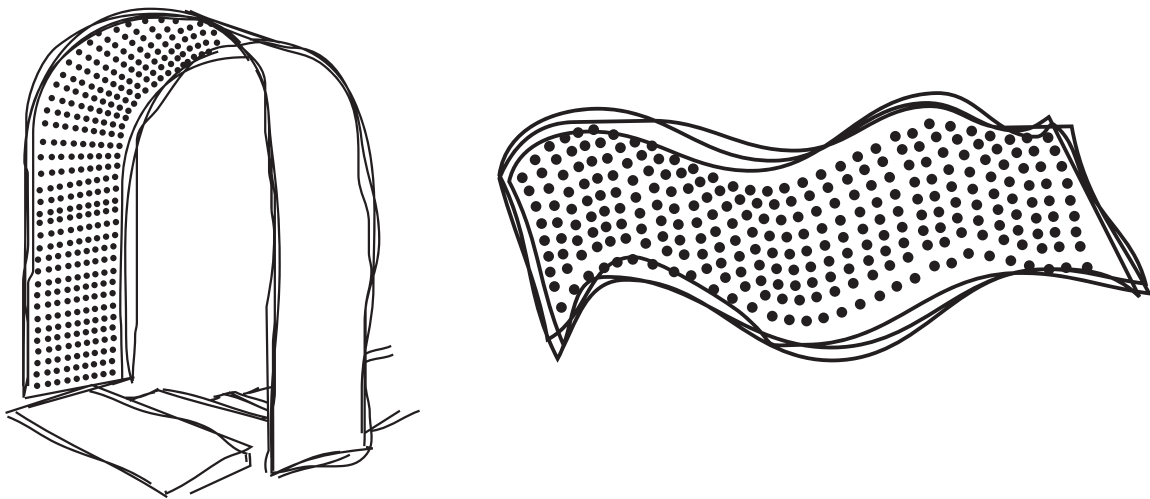

Create something different

Building on the success of the first generation, digiFLEX's new ruggedised design of the unique rubberfaced, lightweight, bendy LED video solution now offers more for the live events market. It's flexible, thin, magnetic and can be attached to metal structures. All in all, a unique combination that allows you to express your creative ideas.

All you need for live events

- Road hardened for the events industry
- Rock solid on broadcast camera applications (BBC approved)
- Lightweight tiles at under 6kg per m²
- Slim at 16mm depth
- Magnetic mounting for ease of installation
- Up to 2,500 nits brightness
- Very bendy, very funky
- Super quiet

FLEX Series next generation

10mm • 6mm

Remarkably bendy LED tiles



**PLASA
Innovation
award winner**



Tile	
Size (mm):	320 (w) x 160(h) x 16 (d)
Area (m ²):	0.0512
Brightness (nits or cd/m ²):	1,500 to 2,500
Processing (bits):	16
Refresh rate (Hz):	2,400
Resolution (pixels) 6mm/10mm:	48 (w) x 24 (h)/32 (w) x 16 (h)
Physical resolution (pixels m ²) 6mm/10mm:	22,504/10,000
Viewing angle (h/v):	160°/160°
Weight (kg):	0.4

Pixel	
Pixel pitch (mm):	6.666/10
Pixel configuration (RGB):	3 in 1 SMD
LED lifetime (hours):	50,000
Enhanced contrast:	Black face/body


Power	
Input voltage (VAC):	110/240
Input power frequency (Hz):	50/60
Power consumption (watts per tile) 6.666/10mm:	average 10/12 maximum 27/35

All specifications liable to change and should be confirmed at point of order.

NEW IMPROVED

Standard system accessories

- digiLED Navigator screen interface
- digiPRO & PRO HD processors
- Flight cases
- Rental frames
- Hanging bars

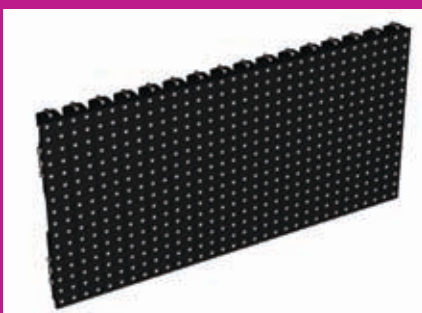

Contact

T +44 (0) 20 7381 7840

F +44 (0) 20 7381 7844

info@digiLED.com

www.digiLED.com