

digiPOD

LED Video Screen – on the move

Outdoor applications

UNRIVALLED value

Event ready in around 20 minutes, the digiPOD brings crystal clear images of live action, entertainment, concerts and sport to any event.

Ideal for advertising, promotional and live events, the mobile screen brings the audience closer to the action every time.

A complete, easy to operate unit, the digiPOD can be towed by a 4 x 4. With fully powered lifting and turning, the screen rotates 360° and sits 2.5 metres off the ground.

Everything you need:

- Complete solution
- Single technician
- On board generator
- Easy operation
- Sharp bright images
- Durable design
- Fast delivery



Contact

T +44 (0) 20 7381 7840

F +44 (0) 20 7381 7844

info@digiLED.com

www.digiLED.com

Big pictures, small prices




digiLED

digiPOD

LED Video Screen – on the move

Outdoor applications

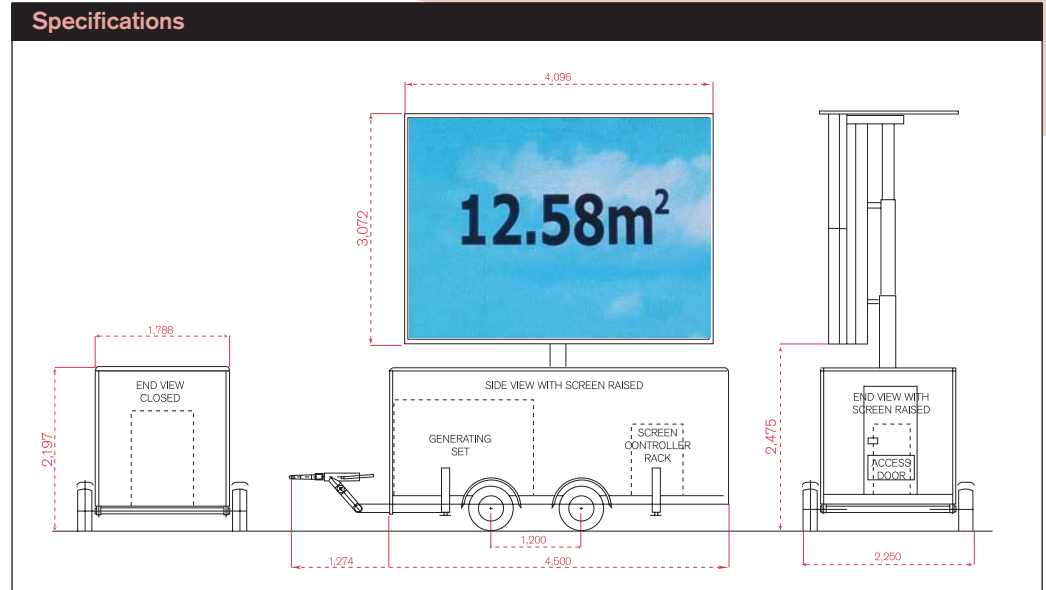

Screen	
Size (mm):	4,096 (w) x 3,072 (h)
Area (m ²):	12.58
Brightness (nits or cd/m ²):	8,500
Processing (bits):	16
Refresh rate (Hz):	2,440
Physical resolution (pixels):	256 (w) x 192 (h)
Effective resolution (pixels):	512 (w) x 384 (h)
Viewing angle (h/v):	160°/60°
Weight (kg):	3,420
Storage temperature (°C):	-40 to +85
Operating temperature (°C):	-20 to +50

Pixel	
Effective pitch (mm):	8
Pixel configuration (RGB):	2,1,1
LED manufacturer:	Nichia* (Oval Discrete)
LED lifetime (hours):	100,000

Power	
Input voltage (VAC):	110/240
Input power frequency (Hz):	50/60
Power consumption: (watts)	average 8,848 maximum 22,112

* LEDs from other manufacturers available on request.

General Specifications	
Trailer (mm):	4,500 (w) x 2,197 (h) x 1,788 (d)
Generator:	20KVA, diesel fuelled
Operating hours:	18 continuous hours at full load
Wind load (km/h)	17 metres/second
Noise level*:	61 dba at 7 metres

* Optional silent running generator

Contact

T +44 (0) 20 7381 7840
F +44 (0) 20 7381 7844
info@digiLED.com
www.digiLED.com

Specifications subject to change without any prior notification.

Big pictures, small prices

