


MIRAGE F

FLEXIBLE MESH TECHNOLOGY FOR OUTDOOR USE

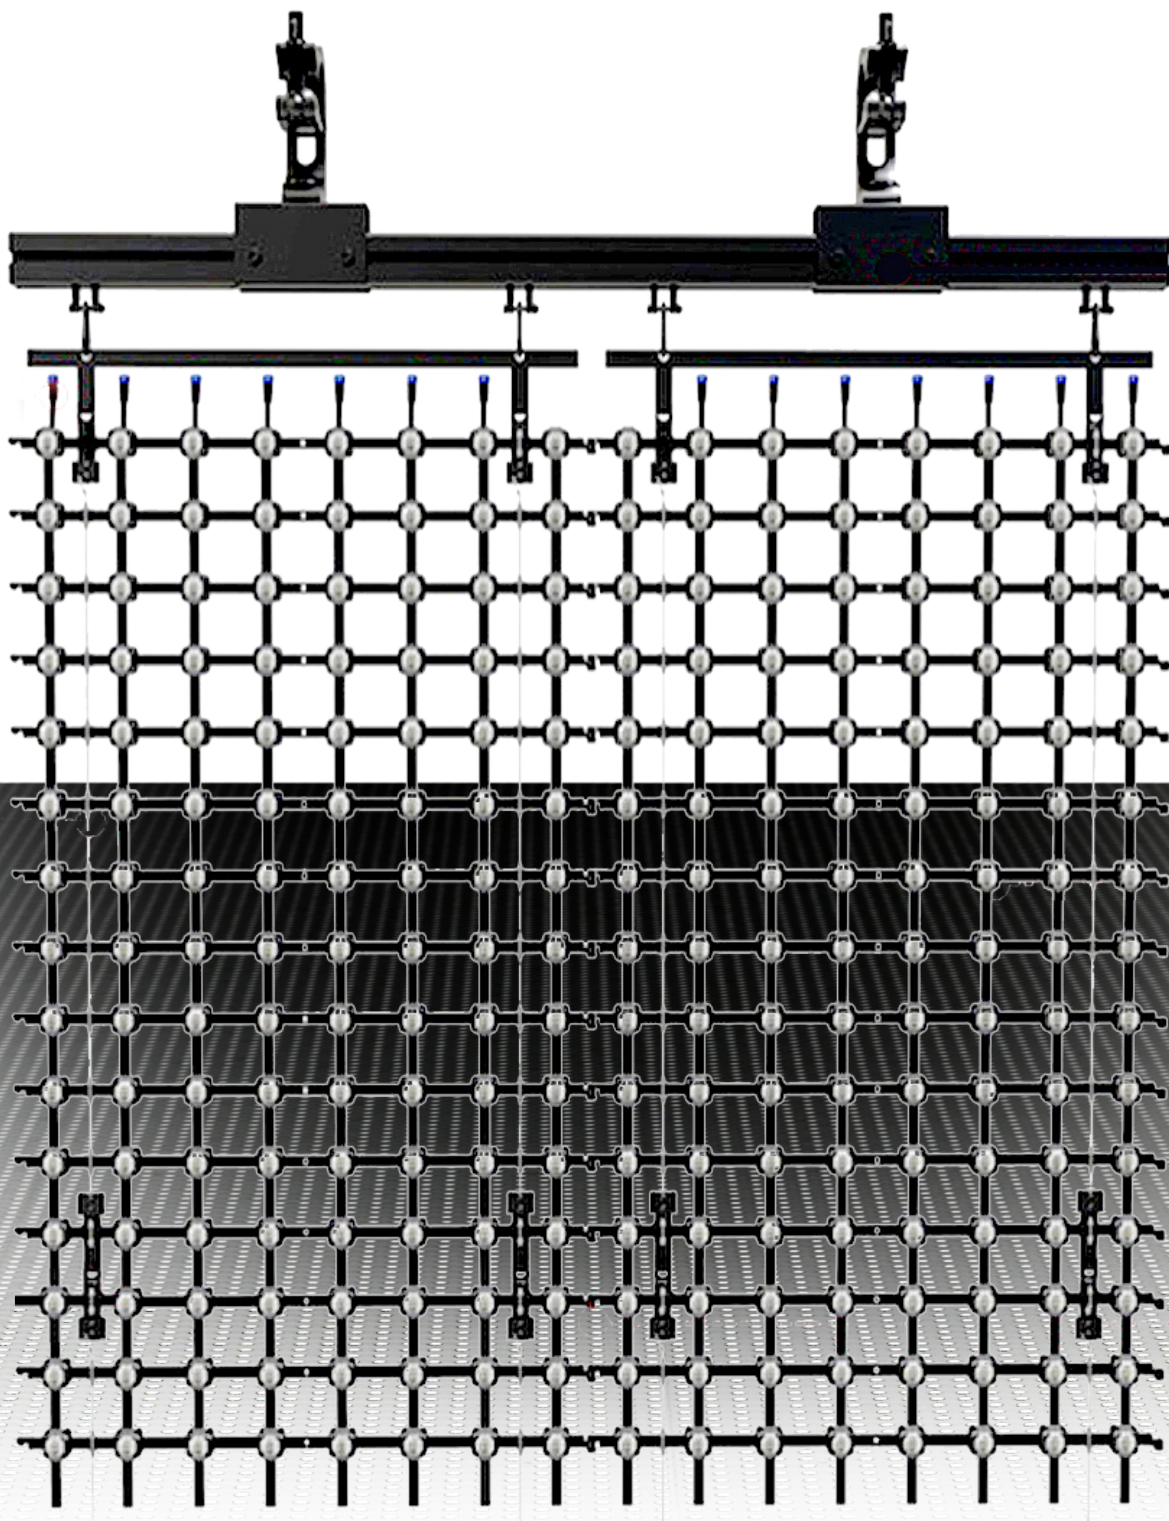

FLEXIBLE MESH TECHNOLOGY FOR OUTDOOR USE

Easy to Install

MIRAGE Fs innovative design combines cleverly positioned fixing points with magnetic buckle attachments between LEDs. With its lightweight construction, installation becomes quick and convenient, reducing labour time and expense.

Flexible Mesh Technology

MIRAGE F uses a flexible mesh construction, with a plastic body and silicon cables, making it flexible in every direction (X/Y/Z planes).

Transparent



With 50% transparency, MIRAGE F is suitable for any location where a degree of translucency is needed. The impact is best when positioned by a window, or where external light is still needed inside a room.

Lightweight

The MIRAGE F offers panel weights of only 6.72kg per sqm, reducing support structure costs and dead mass weights on any mountings and fixings.

Simple Maintenance



With front and/or rear servicing to all electronics and easy to swap units, the MIRAGE F is as simple as it gets if something needs to be replaced. Offering front access where rear access is impossible or inconvenient, and rear access for faster accessibility.

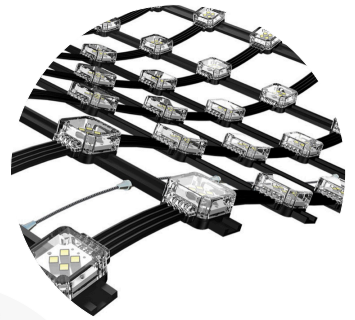

LED encasement




Magnetic buckle attachment between LED encasements

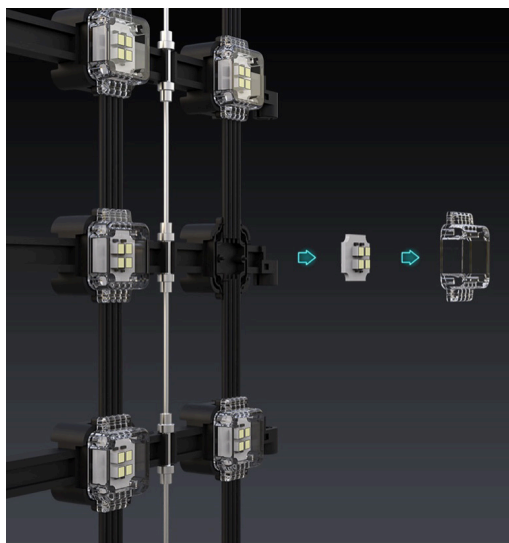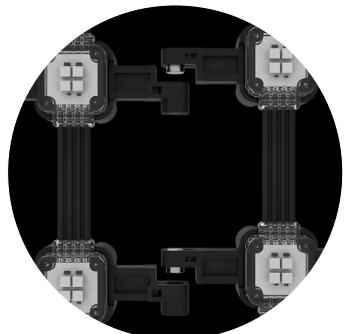

FEATURES

Magnetic locking



Encapsulated LEDs




Lifting hook



Waterproof connector

Weatherproof metal connections

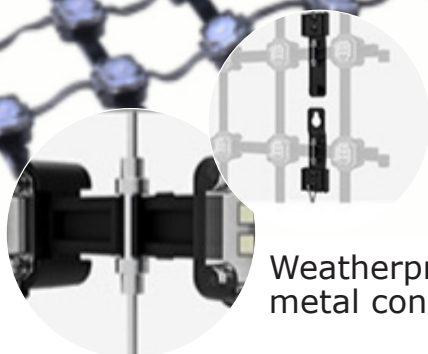

SPECIFICATIONS

OUTDOOR

	MIRAGE F
Physical Pixel Pitch (HxV) mm	40
Pixel Resolution (Width/Height) pixels/panel	8/100
Panel Dimensions (W x H x D) mm	4000 x 320 x 19
Standard Panel Area m2	1.28
Standard Weight kg/m2	6.72
Ingress Protection (Front/Rear)	Indoor IP66/IP66
Maintenance Access	All Front
Standard Refresh Rate Hz	≥2000
Uncalibrated Brightness* nits	≥6250
Calibrated Brightness* nits	N/A
Input Voltage VAC/Hz	100~240/50-60
Max Power Consumption** W/sqm	563
Typical Working Power Consumption** W/sqm	169
Operating Temperature (min/max) degC	-40/+65
Transparency %	50
Certification	CE (IEC82368-1) TBC, (TUV, ETL, EMC): TBC, FCC, RoHS
HDR***	(see foot note)

All specifications are subject to change without prior notification. E&OE.


Specifications are for standard system configuration. Contact your digiLED expert for detailed specification.

*The figures shown for brightness are standard guideline figures only and based on average test laboratory conditions.

** The figures shown for power consumption are standard guideline figures only and based on average test laboratory conditions.

***HDR: Subject to system configuration and processing.

APPLICATION EXAMPLES

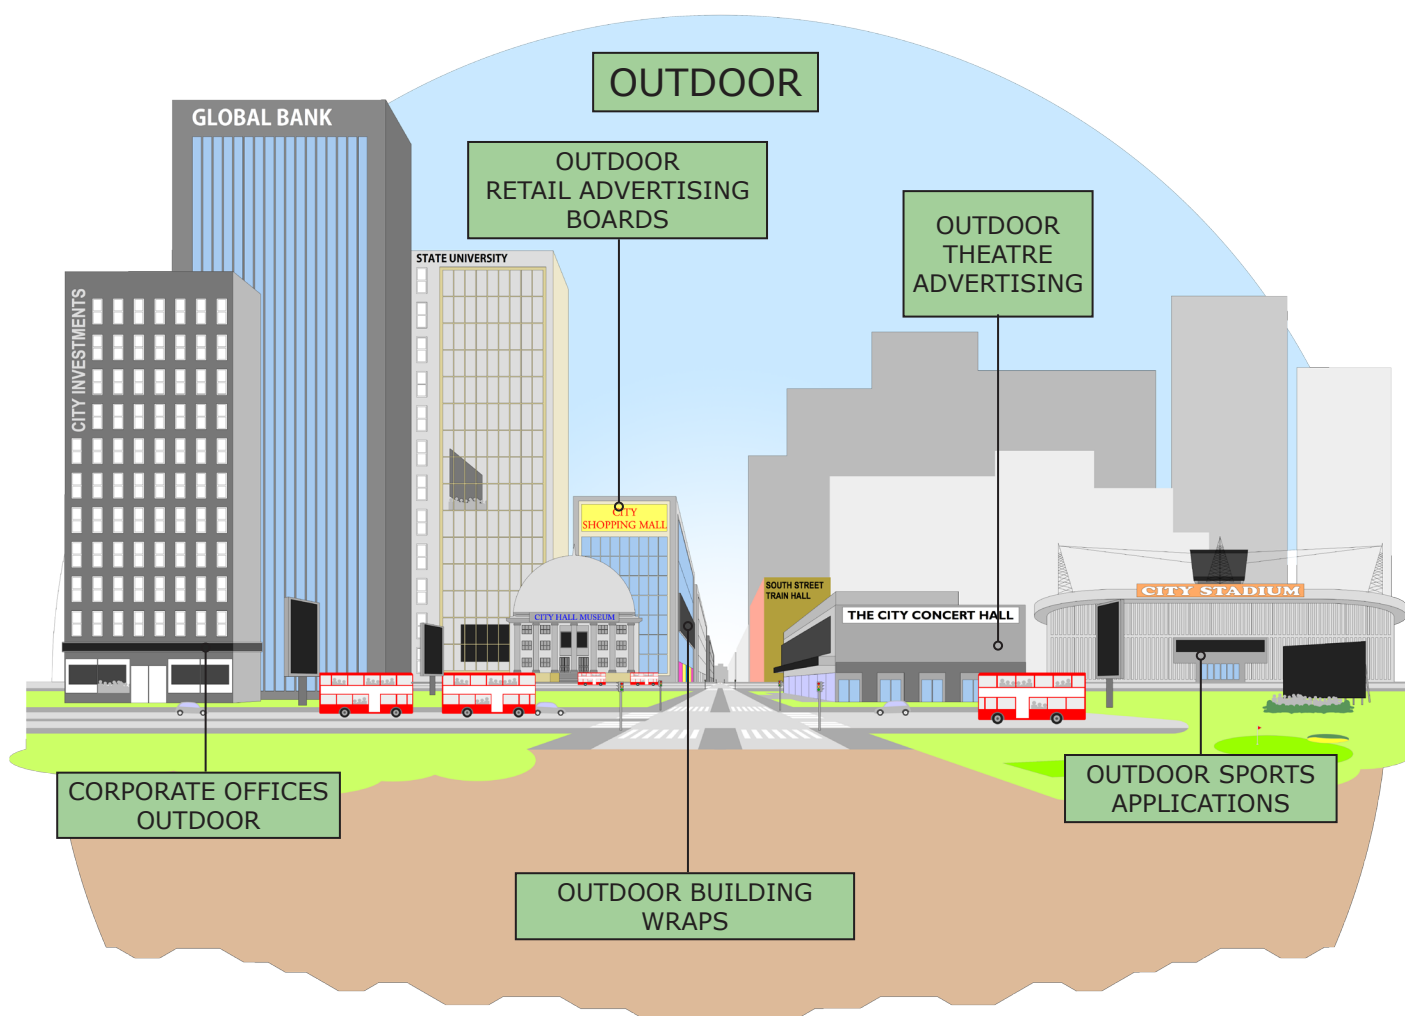

Our Ethos

Our goal is to do business with suppliers and customers whose company we enjoy and whose principles and values we respect.

We endeavour to be politely firm in our beliefs and steadfastly uphold our standards by doing the job correctly to produce quality products, supplied with loving care, to customers who cherish our systems and the enthusiastic, friendly expertise we strive to provide.

We love our work and are proud of our experience and our expertise. We want to do business with people who see the benefits of what we do and appreciate our input.

digiLEDers are keen to offer advice and an insight into our specialist knowledge without demanding a commercial return, if we can't convince customers of our value, we don't deserve their patronage.

Our Products

Huge, bright, vibrant, bespoke, digiLED screens are designed by seasoned LED experts, then crafted and assembled in selected, specialist factories.

Assembly, production and testing is monitored by the industry's leading QC team, using a proven 228-step manufacturing QC process paying meticulous attention to fine detail.

The resulting digiLED screens exhibit superior images, provide reliable performance and extended life. Supported locally by experienced, qualified, field and bench engineers. **digiLED quality just lasts.**

CONTACT US

LONDON

UK HEAD OFFICE

The Pixel Depot, Copse Farm, Moorhurst Lane, Beare Green, Surrey RH5 4LJ UK

tel: +44 20 7381 7840 e-mail: info@digiLED.com



Sales



Admin



Pixel Depot



Tech Hub



Service Lab

LAS VEGAS

The Pixel Depot, 365 Pilot Road, Suite A, Las Vegas, Nevada, 89119, USA

tel: +44 20 7381 7840 e-mail: info@digiLED.com



Sales



Admin



Pixel Depot



Tech Hub



Service Lab

DALLAS

digiLED Service Lab, 8291 Gateway Dr, Argyle, TX 76226, USA



Service Lab

SHENZHEN

SHENZHEN DIGI TECHNOLOGY CO. LTD,

The Pixel Depot, Room 1807, Haohai Junyue Bldg, 2092 Shenyan Road, Hai Shan Street, Yantian District, Shenzhen 518000, China



Tech Hub



Logistics



Service Lab

SALES OFFICES IN MILAN, THE HAGUE, NANTES AND TOKYO

TALK TO US AND BE SOCIAL

+44 20 7381 7840 info@digiLED.com www.digiLED.com



[digiLED_](#)



[digiLEDscreens](#)



[digiLEDscreens](#)



[digiLED_](#)