



# digiTILE HD

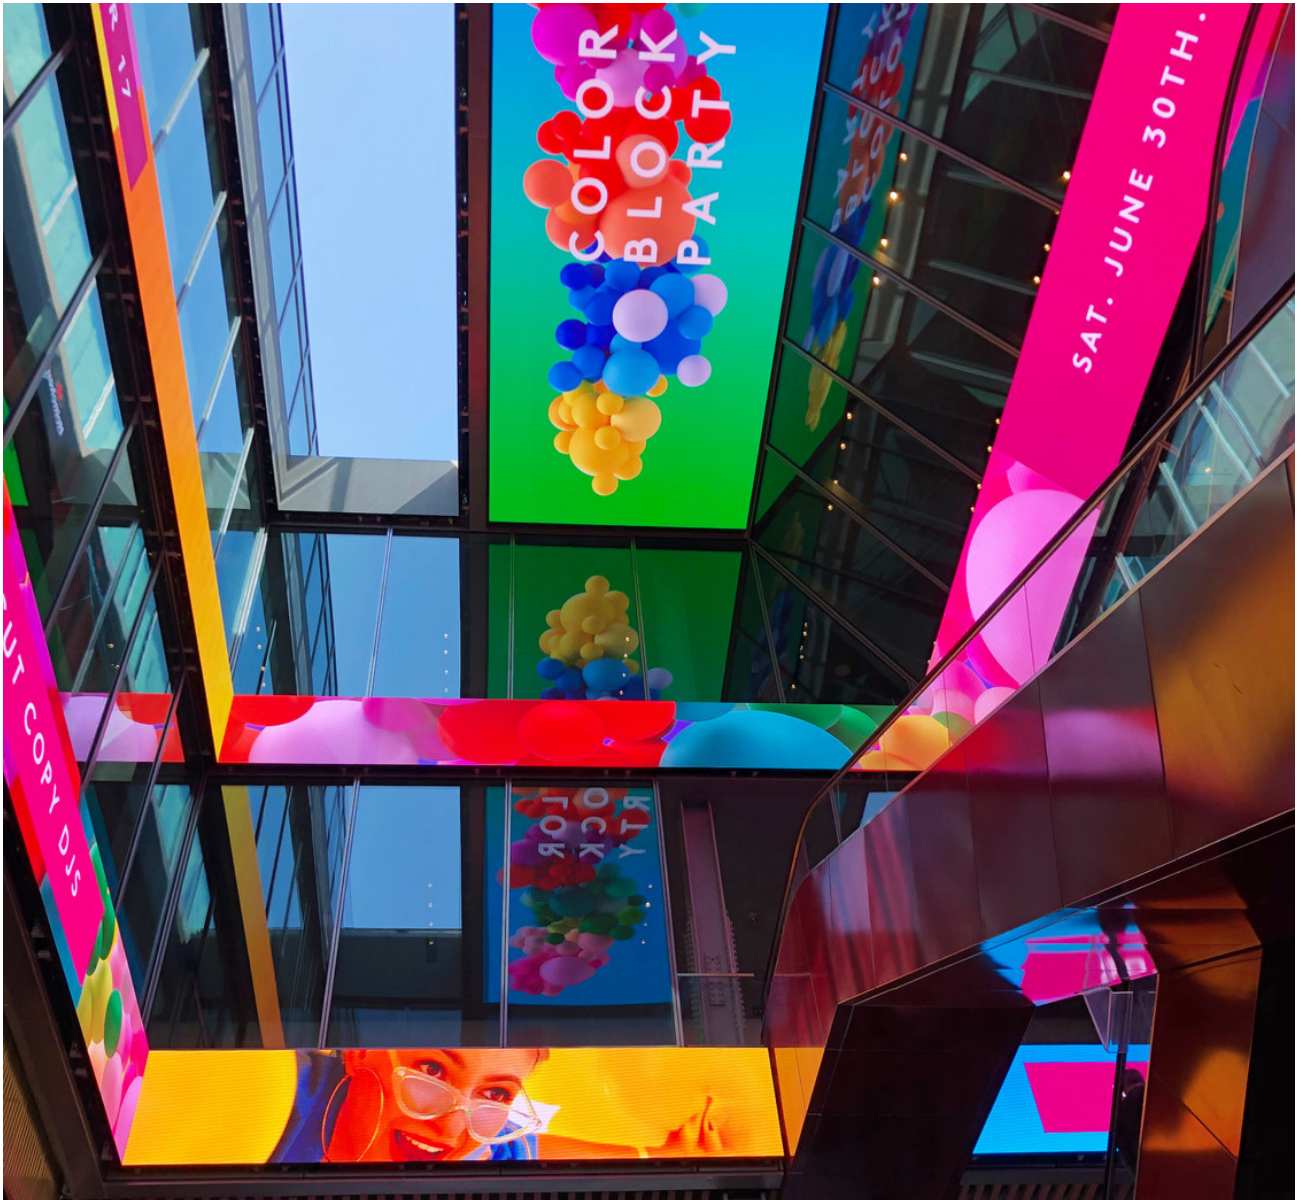

A UNIVERSAL LED TILE SCREEN SYSTEM  
MEETS THE DEMANDS OF TODAY'S FIXED INSTALL MARKETS  
AS THIN AS 60MM  
CATERING FOR THE HD/4K/6K/8K MARKET  
PRECISE 16:9 ASPECT RATIO  
PIXEL PERFECT HD RESOLUTIONS  
BENEFIT FROM THE LEGENDARY DIGILED IMAGE QUALITY  
AND TRUE COLOUR RENDITION EXPERTISE.

## digiTILE HD FEATURES

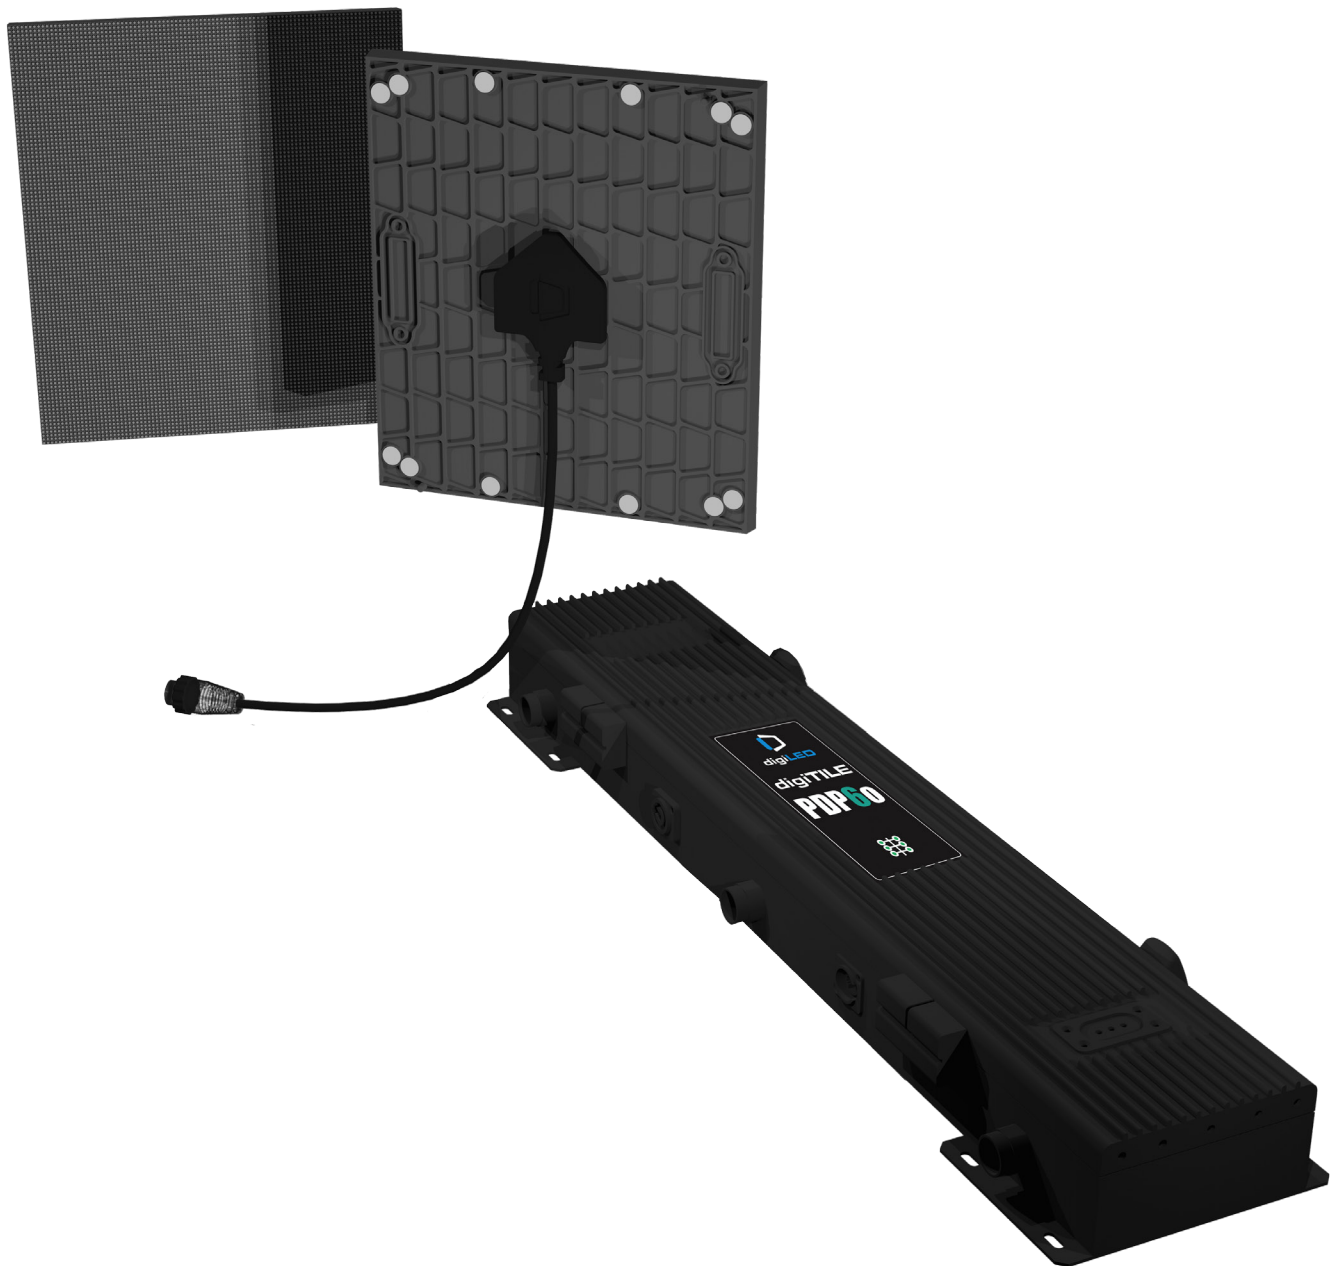

### Simple Easy Installation and Maintenance Universal and Adaptable

#### Universal

- An indoor and outdoor, high resolution tile based screen system.
- Based on magnetic tiles swiftly fixing to any magnetic surface for adaptability and creativity.
- Certified with CE, TUV and ETL.

#### Easy installation & maintenance


Front maintenance using a dAVE 250 vacuum device for removing tiles easily.

PDP is removed via the front.

Screen size can be customised based on specific requirements.

# digiTILE HD

## TILE & PDP SPECIFICATIONS



### LED TILE

		HD3910o
Physical Pixel Pitch (HxV) mm		3.906
Pixel Resolution (Width/Height) pixels/panel		64/72
Tile Dimensions (W x H x D) mm		250 x 281.25 x 16 (Depth, 86.2mm including PDP)
Standard Tile Area m2		0.07
Standard Weight kg/m2		0.07 (1.2 with Umbilical Cable)
Ingress Protection (Front/Rear)		IP65/IP54
Maintenance Access		All Front
Standard Refresh Rate Hz		≥3840 TBC
Uncalibrated Brightness* nits		≥6500
Calibrated Brightness* nits		≥5500
Input Voltage VAC/Hz		100-250/50-60
Max Power Consumption** W/sqm		796
Typical Working Power Consumption** W/sqm		239
Operating Temperature (min/max) degC		-20/+50
Certification		CE (IEC82368-1), FCC, EMC, LVD, RoHS, ETL, TÜV
HDR***		(see foot note)



### PDP


		PDP6	PDP8
PDP Dimensions (H x W x D) mm		172.5 x 730 x 60	172.5 x 900 x 60
Ingress Protection (IP Rating) (Front/Back)		IP65/IP54	
Standard Weight kg		4.5	5.5
Certifications		CE (IEC82368-1), FCC, EMC, LVD, RoHS, ETL, TÜV	

Peak (max.) input power figures are an approximation for guidance purposes only and should not be relied upon. Figures can change subject to LED type and brightness. Average figures are a typical assumption based on 30% of the peak value and may vary according to usage and media content shown. All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order. E&OE.

## digiTILE HD

### TILE and PDP DETAIL


#### digiTILE HD LED TILE

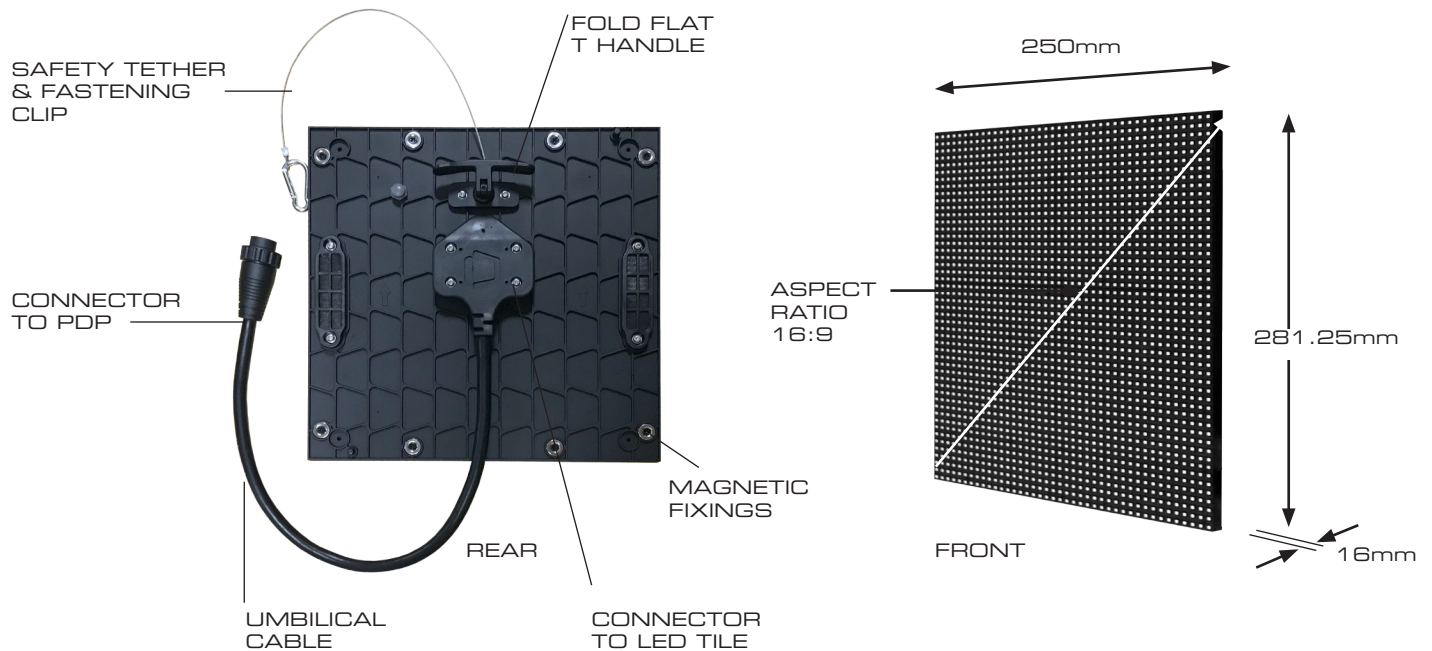

## digILED Application Experts

- Site surveys, install design & visuals
- Procurement / installation of screen surface & structures
- System commissioning & ongoing maintenance / warranty

#### digiTILE PDP Power and Data Pack

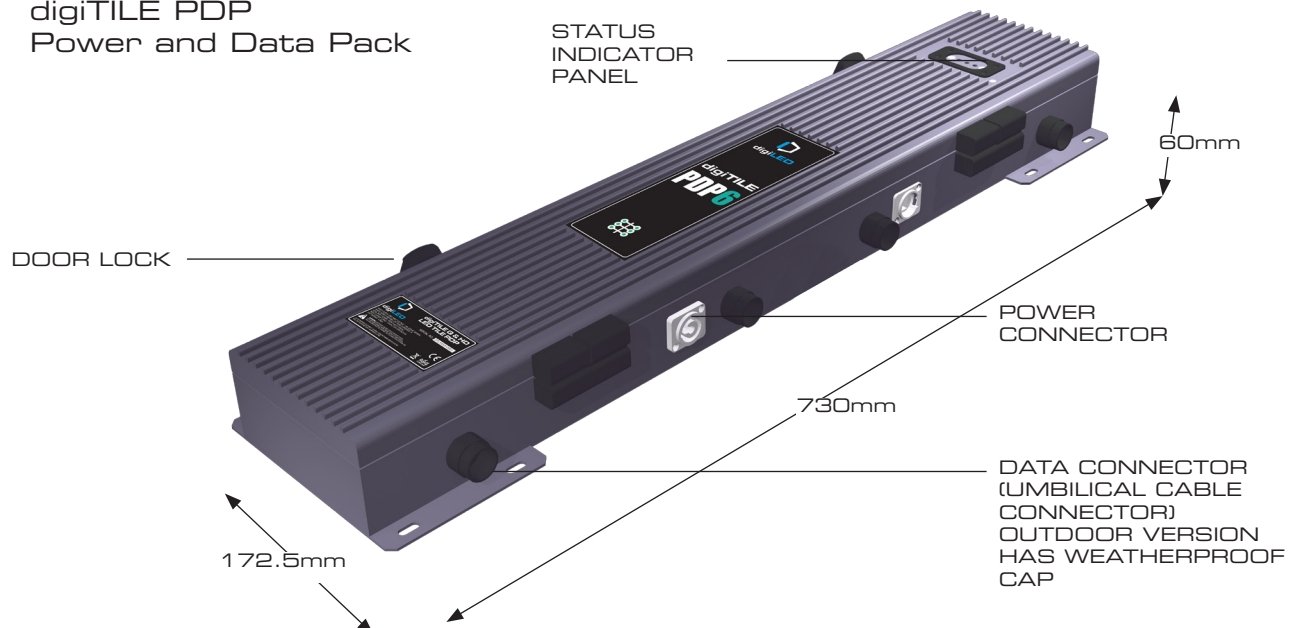

NOTE:  
PDP8 HAS 8 PORTS FOR DATA (as shown above)  
PDP6 HAS ONLY 6 USABLE PORTS (2 are redundant)